


BSCW-899

9" Spading Closing Wheel

Installation Instructions

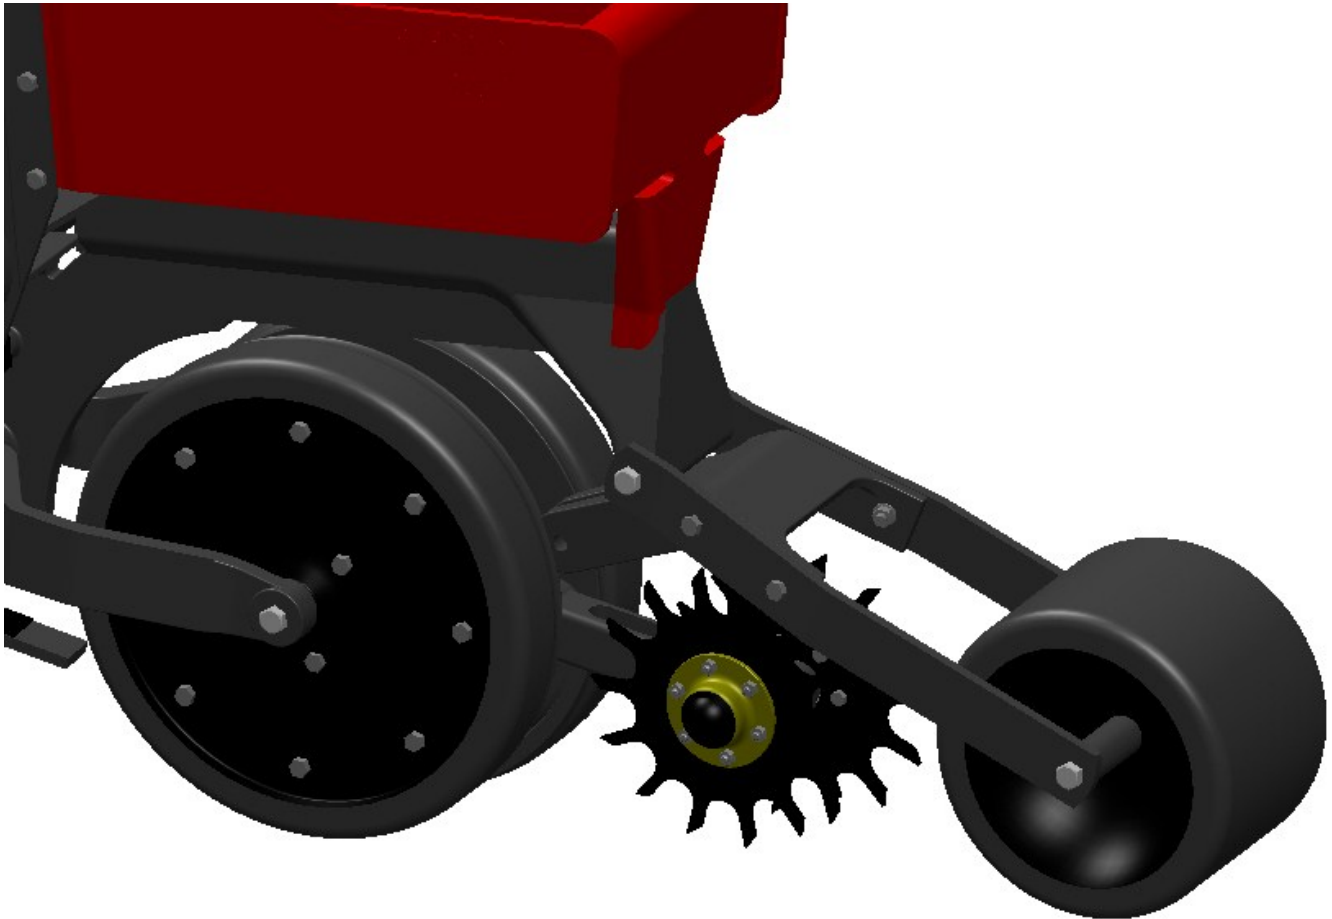

Martin Planter Attachments

Martin Industries LLC

206 Elk Fork Road

Elkton, KY 42220

Telephone: 270-265-5817

E-Mail: martin@martintill.com


www.martintill.com



Installation Instructions for BSCW-899 to fit Case IH


- 1) Remove the existing covering disk. Keep the existing hardware to install Martin Spading Closing Wheel.
- 2) Place the two 5/8" SAE washers supplied between the bearing and the mounting bracket on the planter.
- 3) Attach using existing bolt and nut. Be sure rotation is as shown below.
- 4) Install plastic dust cap using a bead of silicone.

Note: Closing wheel pressure may have to be varied to obtain desired results.

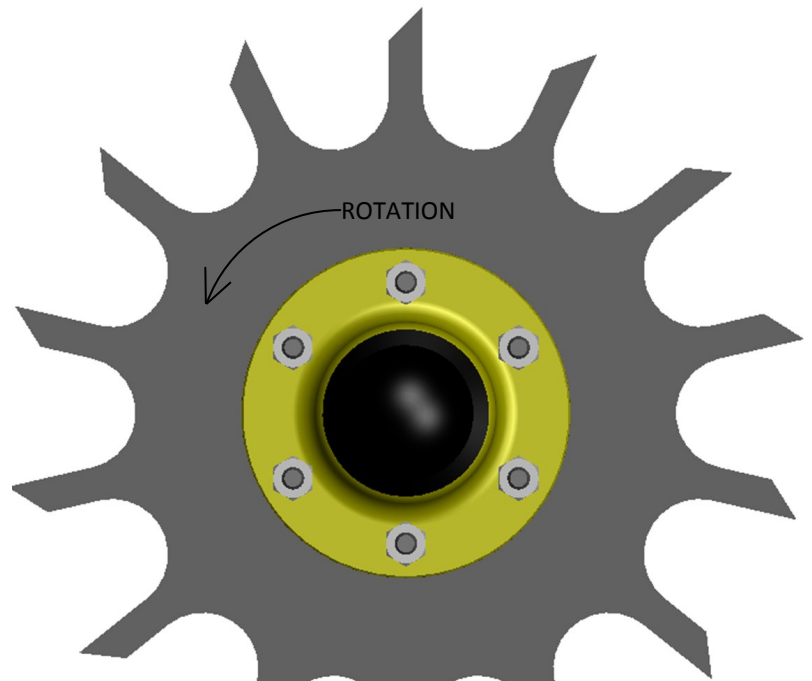

Installation Instructions for BSCW-899 to fit Deere & Kinze Shallow Closing System

- 1) Remove existing covering disk
- 2) Install Martin Spading Closing Wheel using the 5/8" x 2 1/2" bolt and lock nut supplied. Head of the bolt should be on the dust cap side with lock nut on outside of arm.
- 3) Place three 5/8" SAE washers (furnished) between bearing and planter arm. Be sure rotation is as shown below.
- 4) Install the plastic dust cap using a bead of silicone.
- 5) Adjust angle on wheels so the rear is approximately 1/2" closer than the front.

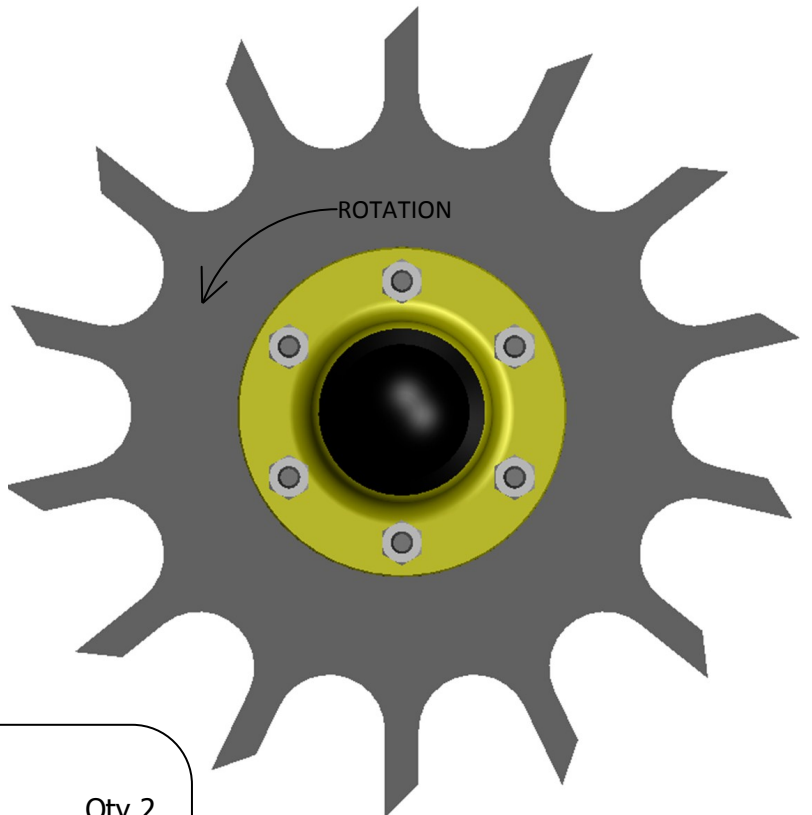

Hardware Required

- | | |
|------------------------------------|-------|
| 1) 5/8" x 2 1/2" Bolt (B5M58NC212) | Qty 2 |
| 2) 5/8" Lock Nut (N58CNL) | Qty 2 |
| 3) 5/8" Washer (W58FYZ) | Qty 6 |
| 4) Dust Cap (MSH62024) | Qty 2 |